


Housing No.	Shaft Dia. d	Dimensions mm														
		D	B	b	G	F	A	L1	L2	L3	H	E	E1	T	S	N
		P.C.D														
SBD 3036	160	280	540	170	52	90	180	83	108	88	360	450	100	305	M30	-
SBD 3136		300	600	200	60	125	200	118	138	116	410	490	105	350	M30	45
SBD 2236		320	640	200	65	110	215	118	133	102	430	540	115	360	M36	-
SBD 3236		320	680	210	65	140	210	133	148	108	430	550	120	360	M30	45
SBD 3038	170	290	570	180	55	96	185	93	118	88	370	480	105	315	M30	-
SBD 3138		320	680	210	65	130	210	123	143	120	435	550	120	370	M36	45
SBD 2238		340	640	200	65	110	215	118	133	102	430	540	115	370	M36	-
SBD 3238		340	710	220	75	150	220	138	153	113	455	560	120	385	M30	45
SBD 3040	180	310	600	190	60	104	200	97	122	97	400	510	110	340	M30	-
SBD 3140		340	710	220	85	135	220	127	147	127	455	560	120	380	M36	52
SBD 2240		360	680	210	70	118	225	122	134.5	107	450	560	120	390	M36	-
SBD 3240		360	780	240	75	165	235	138	158	118	475	640	140	405	M36	52
SBD 3044	200	340	640	200	65	110	215	102	137	102	430	540	115	370	M36	-
SBD 3144		370	780	230	75	150	235	135	160	135	485	640	140	420	M36	52
SBD 2244		400	720	220	75	128	250	124.5	159.5	117	500	600	130	435	M36	-
SBD 3244		400	850	250	80	175	260	148	183	133	525	700	140	445	M36	52
SBD 3048	220	360	680	210	70	118	225	102	142	107	450	560	120	390	M36	-
SBD 3148		400	890	250	80	160	270	152	182	142	550	720	140	455	M36	52
SBD 2248		440	820	250	85	144	285	130	165	132	570	690	150	490	M36	-
SBD 3248		440	900	250	90	190	290	148	188	148	590	750	140	490	M36	52
SBD 3052	240	400	720	220	75	128	250	107	147	117	500	600	130	435	M36	-
SBD 3152		440	900	250	90	175	290	152	187	152	590	750	140	490	M36	52
SBD 2252		480	860	260	90	154	295	145	182.5	137	590	730	160	520	M36	-
SBD 3252		480	960	290	95	205	310	167	208	158	625	800	160	535	M36	65
SBD 3056	260	420	760	240	80	128	260	117	157	122	520	630	140	455	M36	-
SBD 3156		460	900	250	90	175	290	157	197	165	590	750	140	510	M36	65
SBD 2256		500	900	270	95	158	315	152	192	147	630	770	170	555	M36	-
SBD 3256		500	1000	300	100	210	320	178	218	163	645	840	170	555	M36	65

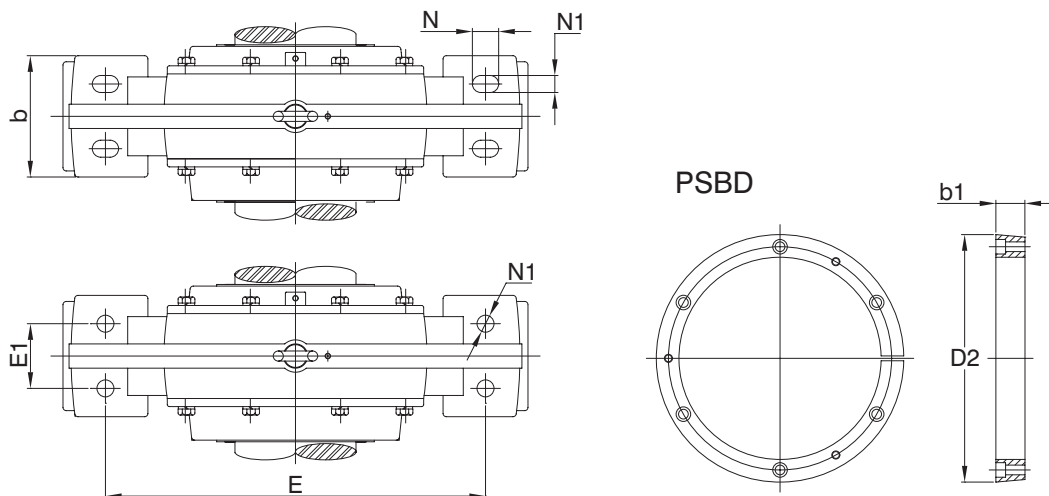

			Bearing No.	Adapter Sleeve	Weight		Adapter Ring Designation	Dimensions		Housing No.
N1	X	C1			A	B		D2	b1	
					(kg)	(kg)				
35	70	3	23036 CCK/W33	H 3036	64	70	PSBD 160	195	20	SBD 3036
35	82	3	23136 CCK/W33	H 3136	118	130	PSBD 160	195	20	SBD 3136
42	78	4	22236 CCK/W33	H 3136	112	120	PSBD 160	195	20	SBD 2236
35	90	3	23236 CCK/W33	H 2336	147	160	PSBD 160	195	20	SBD 3236
35	72	3	23038 CCK/W33	H 3038	74	80	PSBD 170	205	20	SBD 3038
42	88	3	23138 CCK/W33	H 3138	146	160	PSBD 170	205	20	SBD 3138
42	82	4	22238 CCK/W33	H 3138	126	135	PSBD 170	205	20	SBD 2238
35	95	4	23238 CCK/W33	H 2338	170	185	PSBD 170	205	20	SBD 3238
35	78	4	23040 CCK/W33	H 3040	83	90	PSBD 180	215	20	SBD 3040
42	95	3	23140 CCK/W33	H 3140	175	190	PSBD 180	215	20	SBD 3140
42	85	4	22240 CCK/W33	H 3140	145	155	PSBD 180	215	20	SBD 2240
42	100	4	23240 CCK/W33	H 2340	200	220	PSBD 180	215	20	SBD 3240
42	80	4	23044 CCK/W33	OH 3044 H	107	115	PSBD 200	246	25	SBD 3044
42	100	4	23144 CCK/W33	OH 3144 H	205	220	PSBD 200	246	25	SBD 3144
42	95	4	22244 CCK/W33	OH 3144 H	187	200	PSBD 200	246	25	SBD 2244
42	112	4	23244 CCK/W33	OH 2344 H	270	290	PSBD 200	246	25	SBD 3244
42	85	4	23048 CCK/W33	OH 3048 H	120	130	PSBD 220	266	25	SBD 3048
42	106	4	23148 CCK/W33	OH 3148 H	250	270	PSBD 220	266	25	SBD 3148
42	105	5	22248 CCK/W33	OH 3148 H	235	250	PSBD 220	266	25	SBD 2248
42	122	5	23248 CCK/W33	OH 2348 H	345	370	PSBD 220	266	25	SBD 3248
42	92	4	23052 CCK/W33	OH 3052 H	153	165	PSBD 240	286	25	SBD 3052
42	118	4	23152 CCK/W33	OH 3152 H	300	320	PSBD 240	286	25	SBD 3152
42	110	5	22252 CCK/W33	OH 3152 H	290	310	PSBD 240	286	25	SBD 2252
42	132	5	23252 CACK/W33	OH 2352 H	435	470	PSBD 240	286	25	SBD 3252
42	96	5	23056 CCK/W33	OH 3056 H	177	190	PSBD 260	306	25	SBD 3056
42	120	5	23156 CCK/W33	OH 3156 H	325	350	PSBD 260	306	25	SBD 3156
42	115	5	22256 CACK/W33	OH 3156 H	330	350	PSBD 260	306	25	SBD 2256
42	135	5	23256 CACK/W33	OH 2356 H	490	530	PSBD 260	306	25	SBD 3256