


Designations Complete Pillow Block * § †	A	B	b	G	E	E	E1	F	H	Static oil level	L	Blots (No Req'd)	T	D
	in	in	in	in	Max in	Min in	in	mm						(H7)
SDAF 23248	10-1/4	35	13-1/8	3-3/4	30-1/2	29	8-3/4	179.6	20-7/8	3-9/32	14-1/4	(4)-1-5/8	8-3/4	440
SDAF 23252	12	38-1/4	14-3/4	4	33-1/2	32-3/4	9	193.6	23-7/16	4-3/8	15-1/2	(4)-1-5/8	9-1/2	480
SDAF 23256	12	38-1/4	14-3/4	4	33-1/2	32-3/4	9	195.6	23-7/16	4	15-1/2	(4)-1-5/8	9-1/2	500
SDAF 23260	12-13/16	41-3/4	15-3/4	4-1/2	36-1/2	35	10-1/2	211.6	25-3/4	4-3/32	16-3/4	(4)-1-7/8	10-3/8	540
SDAF 23264	14	43-3/4	17-3/4	5	38-1/4	36-3/4	10-3/4	227.6	27-7/8	4-3/4	18-3/4	(4)-2	11-1/4	580
SDAF 23268	14-1/2	46	17-1/8	5-1/4	40-3/4	39-1/4	11	243.6	28-7/8	4-17/32	17-5/8	(4)-2	10-7/8	620
SDAF 23272	15-1/2	48-3/4	18-3/4	5-1/2	43-1/2	41-3/4	12-1/4	251.6	30-1/2	5-1/8	19-1/4	(4)-2-1/4	12	650
SDAF 23276	15-1/2	48-3/4	18-3/4	5-1/2	43-1/2	41-3/4	12-1/4	259.6	30-1/2	4-9/16	19-1/4	(4)-2-1/4	12	680
SDAF 23280	17	53	21	5-1/2	46-1/8	44-3/8	14-1/2	275.6	33-3/4	5-5/8	21-3/4	(4)-2-1/4	13-1/4	720
SDAF 23284	18	54-1/4	21-5/8	5-3/4	48-7/8	47-1/8	15	291.6	35-3/4	5-25/32	22-1/4	(4)-2-1/2	13-1/2	760
SDAF 23288	18	54-1/4	21-5/8	5-3/4	48-7/8	47-1/8	15	299.6	35-3/4	5-1/4	22-1/4	(4)-2-1/2	13-1/2	790

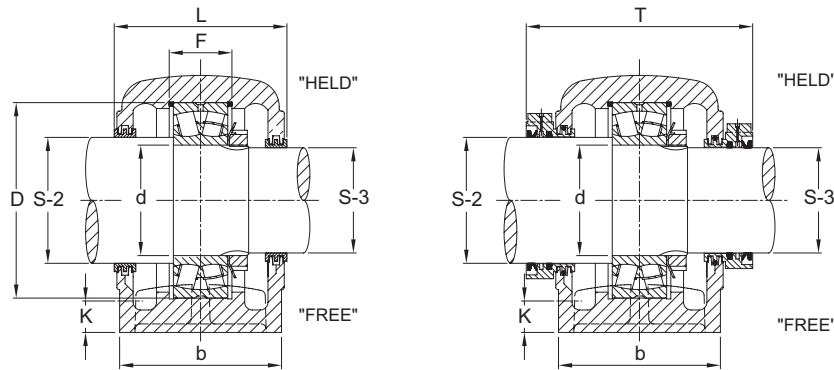

NOTES:

* Basic housing does not include bearing and accessories. The weight is subject to change.

§ For float unit application, order 1-housing, 2-labyrinth seals, 1-adapter sleeve. For fixed unit application, add 1-stabilizing ring to the above.

† Other shaft size are also available.

d	Shaft dia.		Designations										
	S-2	S-3	Complete pillow block	Bearing	Bearing basic load rating	ERF grease speed limit	Lock-nut	Lock-washer	Pillow block housing	Stab. ring (2 Req'd)	Labyrinth Seal		Net Weight *
					dynamic C	r/min					S-2 shaft (1 Req'd)	S-3 shaft (1 Req'd)	
mm	in	in			lbs								lbs
240	10-1/2	9-3/16	SDAF 23248	23248 CA/W33	569 000	670	N 048	P 48	SDAF 3248	A5679	ER 840	ER 923	855
260	11-1/2	9-15/16	SDAF 23252	23252 CA/W33	634 000	630	N 052	P 52	SDAF 3252	A8968	ER 832	ER 845	1040
280	12-1/2	10-3/4	SDAF 23256	23256 CA/W33	634 000	600	N 056	P 56	SDAF 3256	A8975	ER 866	ER 826	1070
300	13	11-1/2	SDAF 23260	23260 CA/W33	621 000	530	N 060	P 60	SDAF 3260	A8970	ER 846	ER 856	1480
320	14	12-1/4	SDAF 23264	23264 CA/W33	866 000	500	N 064	P 64	SDAF 3264	A8977	ER 876	ER 983	1970
340	15	13	SDAF 23268	23268 CA/W33	1 050 000	430	N 068	P 68	SDAF 3268	A8978	ER 847	ER 846	2000
360	16	13-3/4	SDAF 23272	23272 CA/W33	1 050 000	400	N 072	P 72	SDAF 3272	A8979	ER 956	ER 981	2210
380	17	14-1/2	SDAF 23276	23276 CA/W33	1 140 000	380	N 076	P 76	SDAF 3276	A8980	ER 838	ER 984	2225
400	17-1/2	15-1/4	SDAF 23280	23280 CA/W33	1 290 000	340	N 080	P 80	SDAF 3280	A8976	ER 967	ER 895	3510
420	18-1/2	15-3/4	SDAF 23284	23284 CA/W33	1 420 000	320	N 084	P 84	SDAF 3284	A8990	ER 978	ER 907	3800
440	19-1/2	17	SDAF 23288	23288 CA/W33	1 510 000	320	N 088	P 88	SDAF 3288	A8988	ER 926	ER 838	3750