


Housing No.	Shaft Dia.	Dimensions mm													
	d	D	B	b	G	F	A	H	E	E1	LA	LB	C1	K	M
SOFN 614	60	150	330	110	35	51	125	230	260	60	180	180	5	80	40
SOFN 616	70	170	360	135	40	58	140	255	290	80	199	214	5	95	40
SOFN 618	80	190	400	165	50	64	155	280	317	95	225	240	5	104	45
SOFN 620	90	215	420	170	55	73	170	315	347	90	255	270	8	115	45
SOFN 622	100	240	500	190	65	80	190	355	415	100	270	290	8	130	45
SOFN 624	110	260	540	190	65	86	200	380	450	115	285.5	306	8	140	50
SOFN 626	115	280	560	205	65	93	215	405	470	120	300	320	8	150	50
SOFN 628	125	300	630	220	80	102	230	425	510	120	320	340	8	165	60
SOFN 630	135	320	650	240	75	108	245	455	545	150	335	350	10	175	65
SOFN 632	140	340	720	250	85	114	260	480	590	150	350	370	10	190	70
SOFN 634	150	360	730	260	85	120	275	510	600	160	358	378	12	197	70
SOFN 636	160	380	820	280	95	126	305	565	670	180	384.5	404	12	210	80

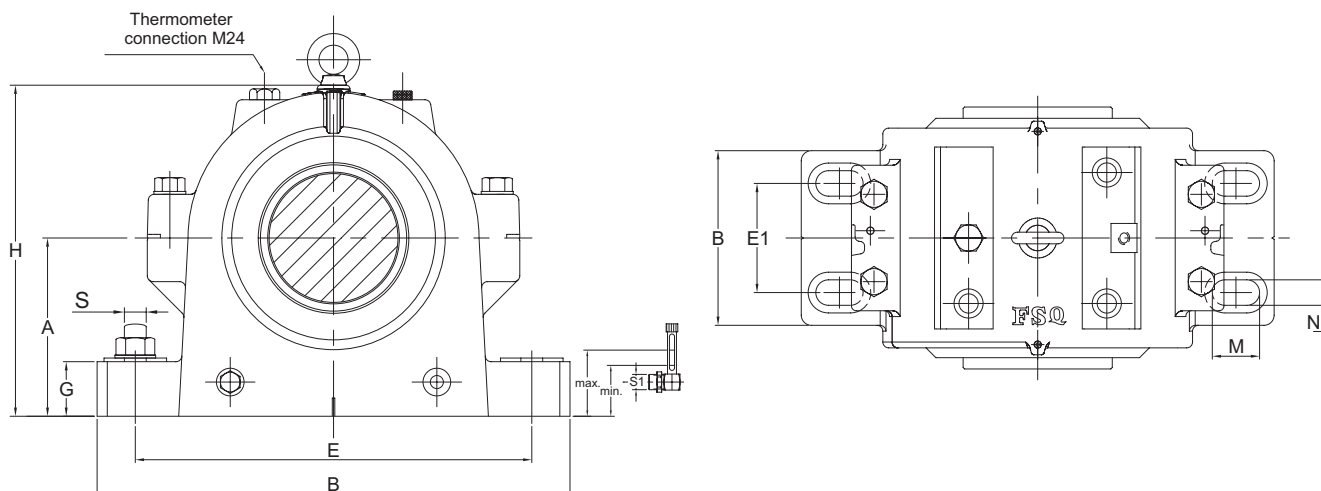

N	T	S		S1	S2	Other Dimensions		Bearing No.	Adapter Sleeve Designation	Level		Housing No.
		mm	in			X1	Ba			max	min	
24	90	20	3/4	G1/2	G3/8	32	43	22314 CCK/C3W33	H2314	65	45	SOFN 614
24	107	20	3/4	G1/2	G3/8	27	50	22316 CCK/C3W33	H2316	73	45	SOFN 616
28	120	24	1	G1/2	G1/2	36	54	22318 CCK/C3W33	H2318	80	55	SOFN 618
28	135	24	1	G1/2	G1/2	38	62	22320 CCK/C3W33	H2320	85	57	SOFN 620
35	145	30	1-1/4	G1/2	G3/4	39	66	22322 CCK/C3W33	H2322	95	67	SOFN 622
35	153	30	1-1/4	G1/2	G3/4	42.5	70	22324 CCK/C3W33	H2324	100	65	SOFN 624
35	160	30	1-1/4	G1/2	G3/4	45	75	22326 CCK/C3W33	H2326	105	70	SOFN 626
35	170	30	1-1/4	G1/2	G3/4	40	80	22328 CCK/C3W33	H2328	115	70	SOFN 628
35	175	30	1-1/4	G1/2	G3/4	45	85	22330 CCK/C3W33	H2330	120	75	SOFN 630
42	185	36	1-1/2	G1/2	G3/4	45	90	22332 CCK/C3W33	H2332	125	80	SOFN 632
42	189	36	1-1/2	G1/2	G3/4	45	94	22334 CCK/C3W33	H2334	130	85	SOFN 634
42	202	36	1-1/2	G1/2	G3/4	54.5	98	22336 CCK/C3W33	H2336	155	90	SOFN 636